

DMK 457

Pressure Transmitter for Shipbuilding and Offshore

Ceramic Sensor

accuracy according to IEC 60770:
0.5 % FSO



Nominal pressure

from 0 ... 400 mbar up to 0 ... 600 bar

Output signals

2-wire: 4 ... 20 mA
others on request

Special characteristics

- ▶ LR-certificate (Lloyd's Register)
- ▶ DNV-GL Approval (Det Norske Veritas ▪ Germanischer Lloyd)
- ▶ ABS-certificate (American Bureau of Shipping)
- ▶ CCS-certificate (China Classification Society)
- ▶ pressure port in CuNiFe (sea water resistant)
- ▶ oxygen application

Optional versions

- ▶ IS-version
Ex ia = intrinsically safe
for gases and dusts

The pressure transmitter DMK 457 with ceramic sensor has been designed for typical applications in shipbuilding and offshore constructions as alternative to our pressure transmitter DMP 457 with piezoresistive stainless steel sensor.

In combination with the copper-nickel-alloy the DMK 457 is suitable for seawater, e.g. level measurement in ballast tanks, etc.

Preferred areas of use are

- Drives
- Compressors
- Boiler
- Pneumatic control systems
- Oxygen applications
- Fuel and oil
- Water and sea water



DMK 457


Pressure Transmitter for Shipbuilding and Offshore

Technical Data


Input pressure range																			
Nominal pressure gauge [bar]	-1 ... 0	0.4	0.6	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400	600	
Nominal pressure abs. [bar]	-	-	0.6	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400	600	
Level gauge / abs. [mH ₂ O]	-	-	6	10	16	25	40	60	100	160	250	400	600	-	-	-	-	-	
Overpressure [bar]	4	1	2	2	4	4	10	10	20	40	40	100	100	200	400	400	600	800	
Burst pressure ≥ [bar]	7	2	4	4	5	5	12	12	25	50	50	120	120	250	500	500	650	880	
Vacuum resistance	p _N ≥ 1 bar: unlimited vacuum resistance p _N < 1 bar: on request																		
Output signal / Supply																			
Standard	2-wire: 4 ... 20 mA / V _S = 8 ... 32 V _{DC}																		
Option IS-version	2-wire: 4 ... 20 mA / V _S = 10 ... 28 V _{DC}																		
Performance																			
Accuracy ¹	IEC 60770: ≤ ± 0.5 % FSO																		
Permissible load	R _{max} = [(V _S - V _{S min}) / 0.02 A] Ω																		
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ																		
Long term stability	≤ ± 0.3% FSO / year at reference conditions																		
Response time	< 10 msec																		
¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)																			
Thermal effects (Offset and Span) / Permissible temperatures																			
Thermal error	≤ ± 0.2 % FSO / 10 K in compensated range: 0 ... 85 °C																		
Permissible temperatures	medium: -40 ... 125 °C electronics / environment: -40 ... 85 °C storage: -40 ... 100 °C																		
Electrical protection																			
Short-circuit protection	permanent																		
Reverse polarity protection	no damage, but also no function																		
Electromagnetic compatibility	emission and immunity according to - EN 61326 - DNV•GL (Det Norske Veritas • Germanischer Lloyd)																		
Mechanical stability																			
Vibration	4 g (according to DNV•GL: class B, curve 2 / basis: IEC 60068-2-6)																		
Materials																			
Pressure port	Standard: stainless steel 1.4404 (316L) option ² : CuNi10Fe1Mn (sea water resistant) - for p _N ≤ 400 bar with mechanical connection G1/2" DIN 3852, G1/2" EN 837, G1/2" open port, G1/4" DIN 3852, G1/4" EN 837 - in combination with housing in CuNi10Fe1Mn (not with field housing) -																		
Housing	standard: stainless steel 1.4404 (316L) option ² : CuNi10Fe1Mn (sea water resistant) - in combination with pressure port in CuNi10Fe1Mn - option field housing: stainless steel 1.4404 (316L); with cable gland (CuNi10Fe1Mn not possible)																		
Cable sheath	TPE -U (flame-resistant, halogen free, increased resistance against oil and gasoline, resistant against salt, sea water, heavy oil)																		
Seals (media wetted)	standard: FKM option: FFKM (only for p _N ≤ 100 bar) others on request																		
Diaphragm	ceramic Al ₂ O ₃ 96 %																		
Media wetted parts	pressure port, seals, diaphragm																		
² IS-version on request																			
Category of the environment																			
Lloyd's Register (LR) ³	EMV1, EMV2, EMV3, EMV4												number of certificate: 13/20055						
Det Norske Veritas • Germanischer Lloyd (DNV•GL)	temperature:								D	number of certificate: TAA00001GR									
	humidity:								B										
	vibration:								B										
	electromagnetic compatibility:								B										
	enclosure:								D										
³ for p _N ≤ 160 bar																			

Explosion protection			
Approvals DX19-DMK 457	IBExU 10 ATEX 1068 X / IECEx IBE 12.0027X zone 0: II 1G Ex ia IIB T4 Ga zone 20: II 1D Ex ia IIIC T135 °C Da		
Safety technical maximum values	$U_i = 28 \text{ V}$, $I_i = 93 \text{ mA}$, $P_i = 660 \text{ mW}$, $L_i \approx 0 \text{ }\mu\text{H}$ with field housing: $C_i = 105 \text{ nF}$ with cable outlet: $C_i = 84.7 \text{ nF}$ with ISO 4400: $C_i = 62.2 \text{ nF}$ the supply connections have an inner capacity of max. 90 nF (140 nF with field housing) to the housing		
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with p_{atm} 0.8 bar up to 1.1 bar in zone 1 or higher: -40/-20 ... 70 °C		
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 $\mu\text{H}/\text{m}$		
Miscellaneous			
Option oxygen application	for $p_N \leq 25 \text{ bar}$: O-ring in FKM Vi 567 (with BAM-approval) permissible maximum values are 25 bar/150° C		
Current consumption	max. 25 mA		
Weight	approx. 140 g (with ISO 4400)		
Installation position	any		
Operational life	100 million load cycles		
CE-conformity	EMC Directive: 2014/30/EU Pressure Equipment Directive: 2014/68/EU (module A) ⁴		
ATEX-directive	2014/34/EU		
⁴ This directive is only valid for devices with maximum permissible overpressure > 200 bar			
Wiring diagram			
2-wire-system (current)			
Pin configuration			
Electrical connection	ISO 4400 	field housing (clamp section: 2.5 mm ²) 	cable colours (IEC 60757)
Supply +	1	VS+	WH (white)
Supply -	2	VS-	BN (brown)
Shield	ground pin	GND	GYNE (green-yellow)


Electrical connections ⁵ (dimensions mm / in)




ISO 4400 - Code G10
(IP 65)




ISO 4400 - Code G00
(IP 65)




ISO 4400 - Code G01
(IP 65)



cable outlet ^{6, 7}
(IP 68)

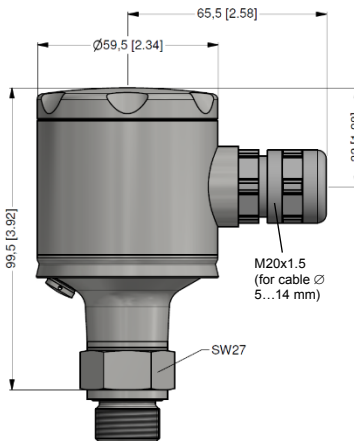

universal field housing
(IP 67)

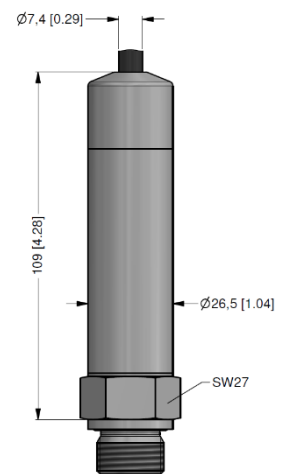


submersible version ⁷
(IP 68)

⁵ Generally shielded cable has to be used! Cable versions are delivered with shielded cable. For ISO 4400 the use of shielded cable is compulsory.

⁶ tested at 4 bar or 40 mH₂O for 24 hours

⁷ shielded cable with integrated air tube for atmospheric reference (for nominal pressure ranges absolute, the air tube is closed); different lengths available

Mechanical connection (dimensions mm / in)

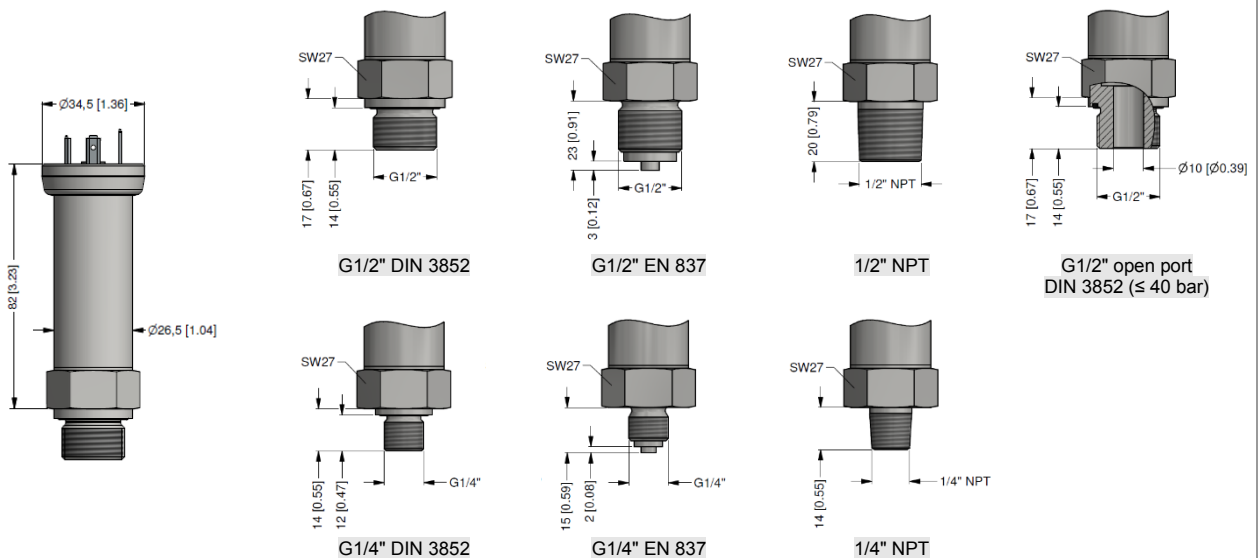

© 2020 BD|SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

